



Instructions

Sportster Inspection Cover

NOTE

Re-use the stock screws, O-rings & gasket from your OEM inspection cover. O-rings (Figure 1 item #2) or gasket (Figure 1 item #4) may need to be replaced depending on the condition.

BQUAZY Sportster recommends installation be done by qualified individuals.

Models


These Kits are designed to fit 2004 and later XL Sportster model motorcycles.

Kit Contents

1 - Inspection Cover

Figure 1.
Inspection Cover Assembly

- 1 - Screw (HD #41191-74A)
- 2 - O-Ring (HD #11171)
- 3 - Inspection Cover
- 4 - Gasket (HD #34986-04)
- 5 - Primary Cover

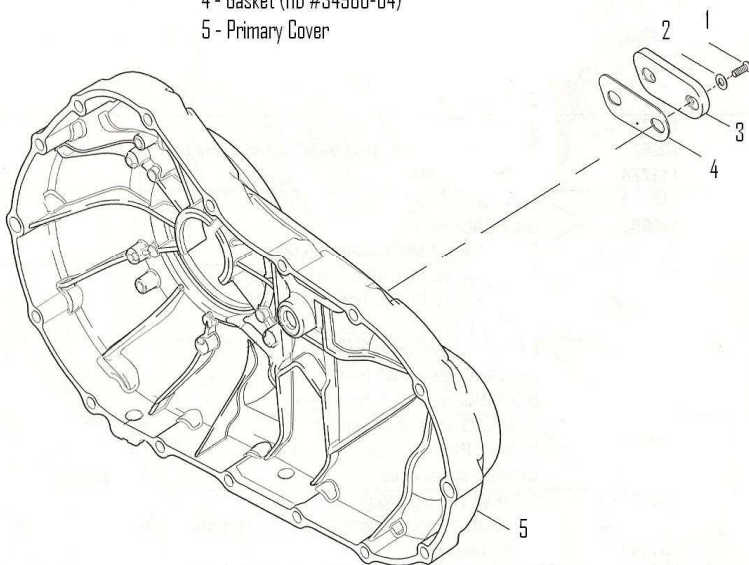

1. Remove stock inspection cover.
2. Inspect condition of o-rings for re-use Figure 1 item #2. If not able to re-use you will need to replace with Harley-Davidson part number 11171.
3. Inspect condition of gasket for re-use Figure 1 item #4. If not able to re-use you will need to replace with Harley-Davidson part number 34986-04.
4. Install gasket, cover, o-rings & screws. We recommend using Blue Loctite® on the screws to help keep them secure.